

SM23205D	
Continuous Torque	2.96 in-lb
	47 oz-in
	0.33 N-m
Peak Torque	5.03 in-lb
	80 oz-in
	0.57 N-m
Nominal Continuous Power	226 Watt
No Load Speed	8,100 RPM
Max. Continuous Current* @ 6900 RPM	6.02 Amps
Peak Power @ 5995 RPM	335 Watts
Voltage Constant	6.137 V/kRPM
Inductance	0.40 mH
Encoder Resolution	4,000 Counts/Rev
Rotor Inertia	0.00224 oz-in-sec ²
	1.582 10 ⁻⁵ Kg-m ²
Weight	1.7 lb
	0.79 kg
Shaft Diameter	0.250 in
	6.35 mm
Shaft, Radial Load	7 lb
	3.18 kg
Shaft, Axial Thrust Load	3 lb
	1.36 kg
DeviceNet Available	Yes
PROFIBUS Available	
CANopen Available	Yes

*Default voltage is 48V. See graphs for additional voltages.




Operating temperature range: 0°C–85°C
Storage temperature range: -10°C–85°C, noncondensing

NOTE: Motor specifications are subject to changes without notice. Consult website and factory for latest data.




Moog Animatics SmartMotor SM23205D (No Options) CAD Drawing


in [mm]

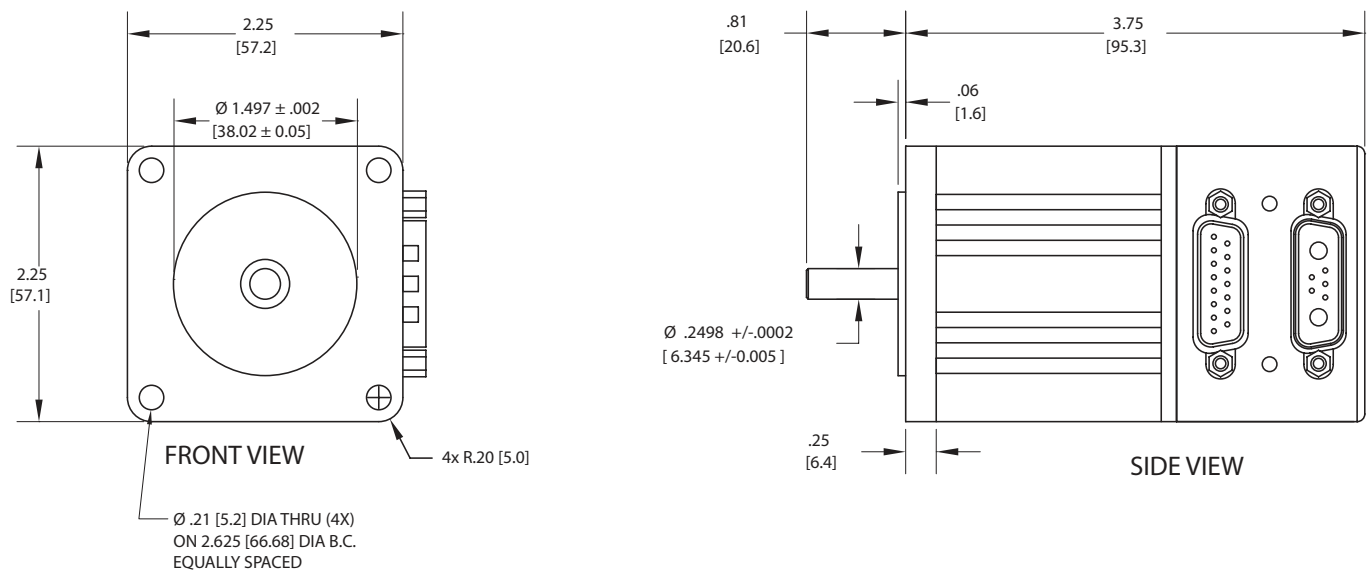


OVERVIEW
SOFTWARE
D-STYLE MOTORS
D-STYLE CONNECTIVITY
PERIPHERALS
M-STYLE MOTORS
M-STYLE CONNECTIVITY
LINEAR SYSTEMS
POWER SUPPLIES & SHUNTS
GEAR HEADS
APPENDIX

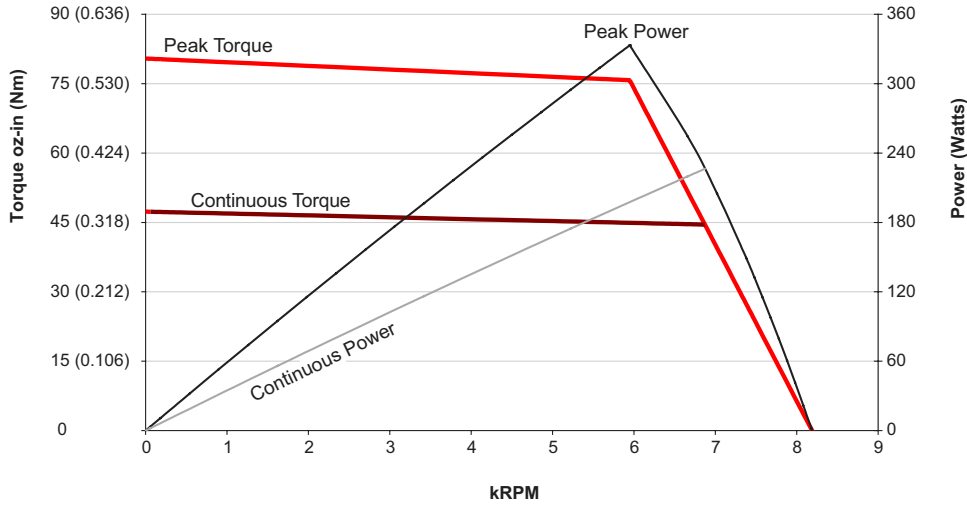

SM23205D
at 48 VDC
at rise to 85°C

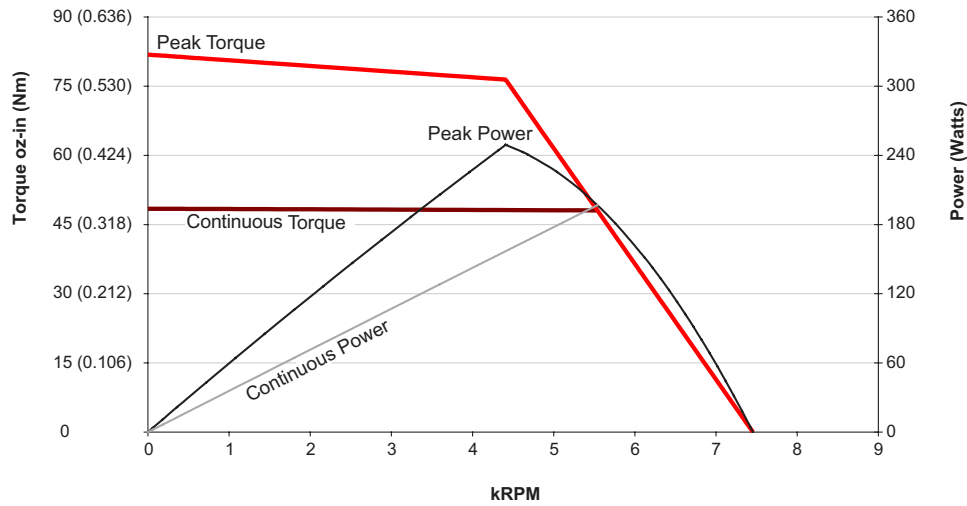

SM23205D
at 42 VDC
at rise to 85°C

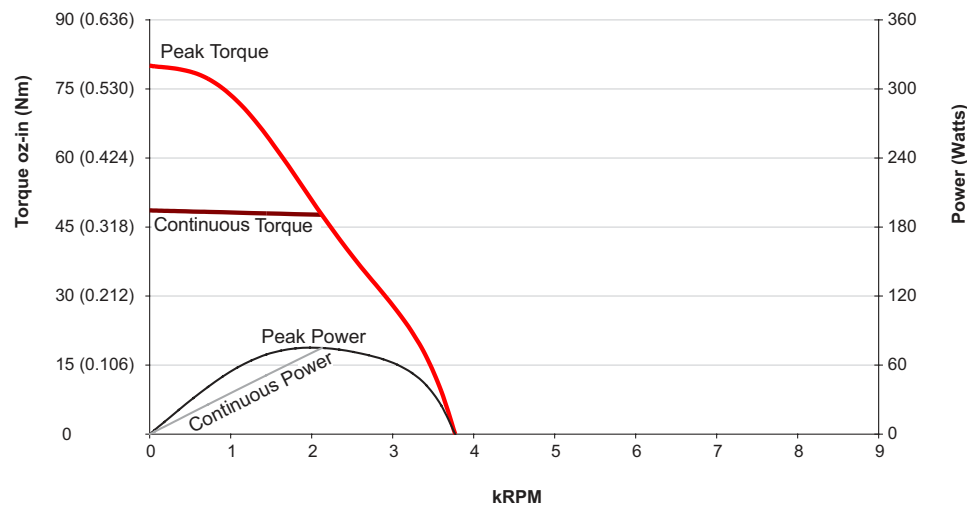

SM23205D
at 24 VDC
at rise to 85°C

All torque curves based on 25°C ambient.
Motors were operated using MDT (Trapezoidal Drive Mode) Commutation.
For ambient temperatures above 25°C, Continuous Torque must be linearly derated to 0% at 85°C.