



Newest Additions to the Series



Small type (Radial Cylinder)
EC-RR3
EC-RR4




Small type
EC-S3
EC-S4



High rigidity (Radial Cylinder)
EC-RR6□AH
EC-RR7□AH




High rigidity (Slider type)
EC-S6□AH
EC-S7□AH




Splash-proof type (Radial Cylinder)
EC-RR6□W
EC-RR7□W



Side-mounted motor
EC-S6□R
EC-S7□R



Side-mounted motor
EC-S6□AHR EC-RR6□R
EC-S7□AHR EC-RR7□R
EC-RR6□AHR
EC-RR7□AHR

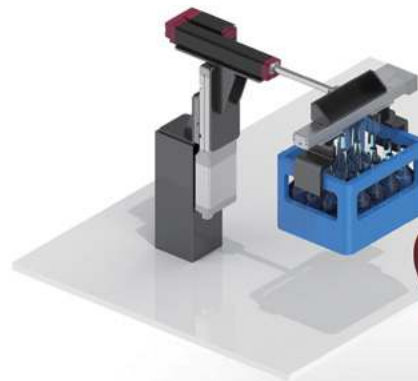

Simple & Wireless Operation

EC Product List

Environmental Resistance

<Features>

- The rod operates in the same way as a rod type air cylinder.
- Waterproof type with ingress protection rating of IP67.
- The Radial Cylinder type is equipped with a ball circulating type built-in linear guide.

<Applications>

- Suitable for use in environments with flying dust or exposure to water.
- Usable in places where food-related equipment is washed.

NEW

Splash-proof
(Radial cylinder)

EC-RR6□W
EC-RR7□W



IP67

Radial Cylinder

Splash-proof
(Rod type)

EC-R6□W
EC-R7□W



IP67

High Rigidity

NEW

Small type
(Radial cylinder)

EC-RR3
EC-RR4



Radial Cylinder

NEW

Side-mounted motor

EC-S6□AHR
EC-S7□AHR

High Rigidity

EC-RR6□R
EC-RR7□R

Radial Cylinder



EC-RR6□AHR
EC-RR7□AHR

Radial Cylinder

High Rigidity

NEW

High rigidity
(Slider type)

EC-S6□AH
EC-S7□AH



High Rigidity

NEW

High rigidity
(Radial cylinder)

EC-RR6□AH
EC-RR7□AH



Radial Cylinder

Radial Cylinder

EC-RR6
EC-RR7



Radial Cylinder

<Features>

- A ball circulating type linear guide is built in.
- The high rigidity slider and high rigidity Radial Cylinder types have a built-in 4-row linear guide. The highly rigid structure supports loads distributed over 4 rows of steel balls.

<Applications>

Radial Cylinder


Suitable for swinging operations such as clamping and opening/closing doors.

High rigidity slider type

Suitable for applications where a large reaction force is applied, such as tightening screws and drilling holes.

<Application Example>

Door open/close




Standard

NEW

Small type

EC-S3
EC-S4



NEW

Side-mounted motor

EC-S6□R
EC-S7□R



Slider type

EC-S6
EC-S7



Rod type

EC-R6
EC-R7



<Features>


- For the slider type, the slider on the top of the body operates in the same way as a slider type air cylinder.
- For the rod type, the rod operates in the same way as a rod type air cylinder.

<Applications>


- | | |
|-------------|---------------------------------------|
| Slider type | Suitable for transporting workpieces. |
| Rod type | Suitable for pushing and lifting. |

<Application Examples>

Slider type
Transferring between conveyors



Rod type
Pushes up the set workpiece



Compact

<Features>


- For the slider type, the table on the top of the body operates.
- For the mini guided rod type, the rod operates.
- The use of a nut rotation mechanism reduces the size.

<Applications>

Suitable for conveying and pushing workpieces in narrow spaces.

Mini Table type

EC-TC4
EC-TW4




Mini Guided rod type

EC-GS4
EC-GD



Immersed in water? No problem!

Splash-proof type Radial Cylinder

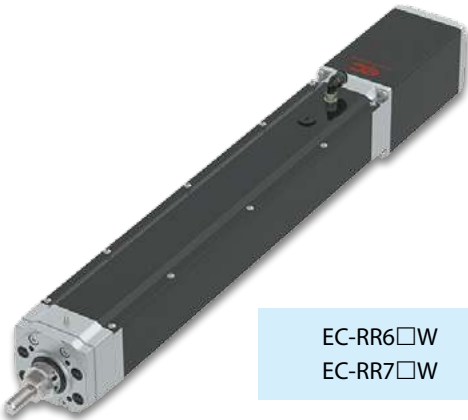

EC-RR6□W
EC-RR7□W

1. The ingress protection rating is IP67.

The Splash-proof structure prevents the ingress of water even when immersed, making it suitable for equipment such as food-related machines and washing machines which are exposed to violent splashes of water.
It can also be used in an environment where oil mist is present around processing machines.

Ingress protection Indication

IP □ □

The first number

Protection against ingress from solid objects, including fingers.

The second number

Protection against water.

*Please consult with us when liquid other than water is used.

Description of protection rating

IP67	Solid objects	: Completely protected from ingress by dust or solid particles.
	Water	: No ingress by water, even when immersed.

2. Fluororubber seal option is added as an option.


A fluororubber seal, which has excellent resistance against cutting oil and cleaning fluid, is added as an option to be used for O-rings and gaskets. (Option code: SLF)
The Radial Cylinder can be used near machine tools where oil mist scatters.

<Application Example>
Processing machine door open/close



3. Equipped with a guide.

A ball circulating type built-in linear guide is equipped in the rod.
The guide part is protected by the water-proof construction, elimination troubles of the guide caused by the environment.

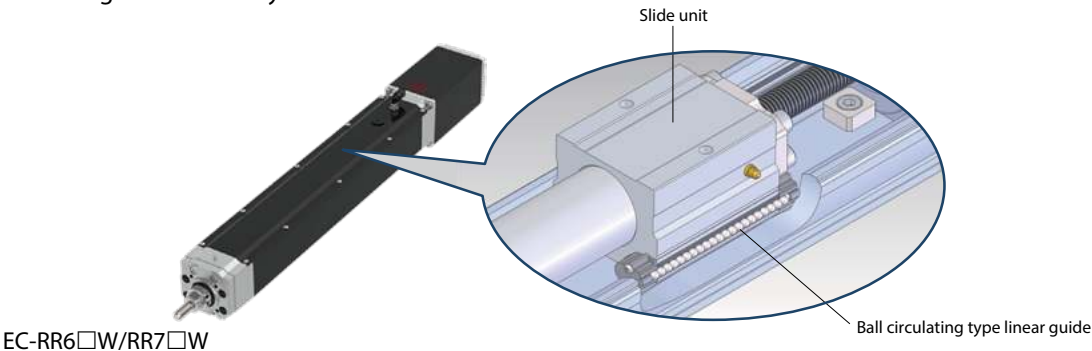

EC-RR6□W/RR7□W

Increased rigidity thanks to the 4-row guide



High Rigidity ELECYLINDER®

4-row linear guide construction (sectional view)

The 4-row steel balls disperse loads

Because of high rigidity

- * Increased dynamic allowable moment
- * Increased load on overhang length
- * Increased transferrable weight

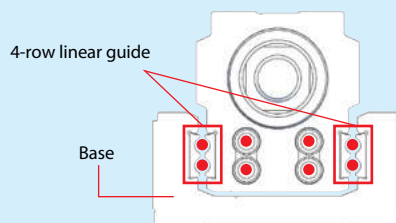


1. Dynamic allowable moment is 3.5 times greater than that of the conventional products.

Slider type

Carry and transfer

Rolling direction

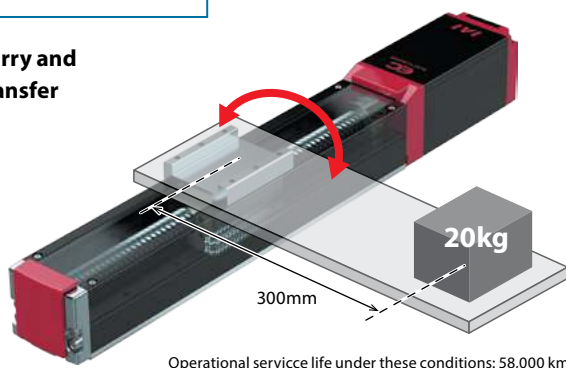

EC-S6□AH ► P47
EC-S7□AH ► P49


Specifications

	S6□AH	S7□AH
Maximum stroke	800mm	800mm
Maximum payload (horizontal)	40kg	51kg
Dynamic allowable moment (rolling direction)	Mc 55N·m	Mc 134N·m

2. Dynamic allowable radial load at the rod tip is 2.8 times greater than that of the conventional products.

Rod type (Radial Cylinder)

Push
Pull
Press-fit

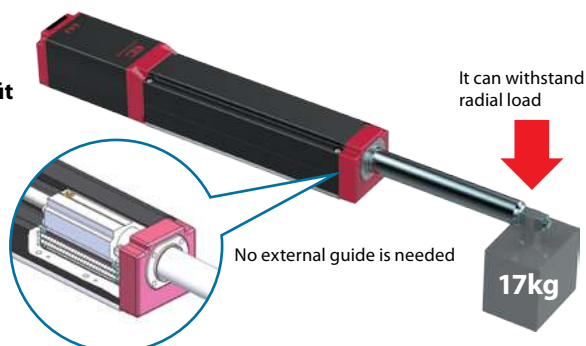

EC-RR6□AH ► P71
EC-RR7□AH ► P73

Specifications

Longest stroke	400mm	500mm
Dynamic allowable radial load at the rod tip *	130N	170N



* Assuming a basic rated service life of 5,000km.
(Note) Please confirm the conditions specified on P107 before use.

Radial load can be applied without an external guide!

Radial Cylinder®

1. Includes a built-in guide.

The radial cylinder is equipped with a built-in ball circulating type linear guide in the rod body. No external guide is required, as both radial loads and eccentric loads can be applied.

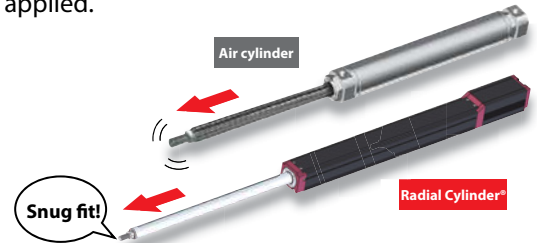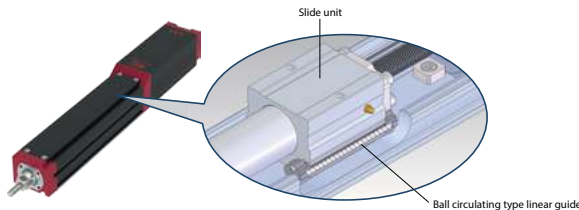


(1) There is no tip runout.

Since it has a built-in linear guide and the rod is supported by the guide, there is no runout to the tip.

(2) It can be used in narrow spaces.

Since there is no need for an external guide, it can be used even in narrow spaces to save overall space.

The theoretical operation life of the 315mm stroke Radial Cylinder, with a load of 2.9kg applied to the rod tip, is 4,770km. When the load on rod tip is halved, the theoretical service life increases 8-fold.

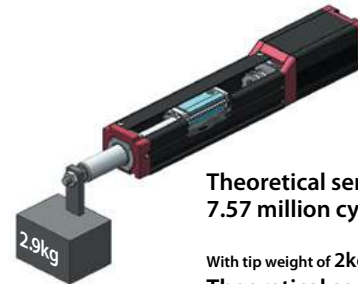

Theoretical service life: 4,770km
7.57 million cycles (when moving 315mm)


With tip weight of 2kg...
Theoretical service life: 14,547km
23.09 million cycles (when moving 315mm)

Palm size

Mini ELECYLINDER®


1. It can be used in narrow spaces.

- (1) The use of a nut rotation mechanism reduces the size.
- (2) Even with a built-in controller, the size is a compact 55mm × 105mm × 78mm.

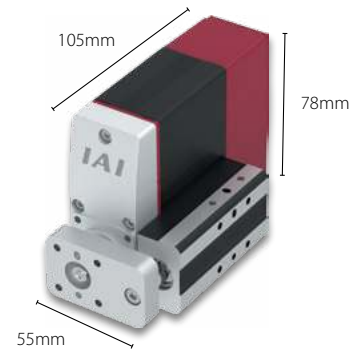

2. As it has a guide, no external guide is required.

- (1) The guide design process can be eliminated.
- (2) It helps save space.

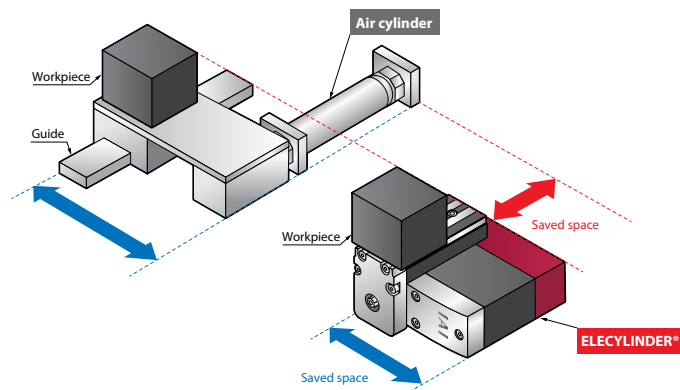

Body widths 35mm and 44mm are now available!


Compact slider Compact Radial Cylinder



1. Compact and lightweight

The body width is only 35mm wide thanks to the built-in controller.


The main unit weight is reduced by 58%, compared to our conventional model with the same stroke.

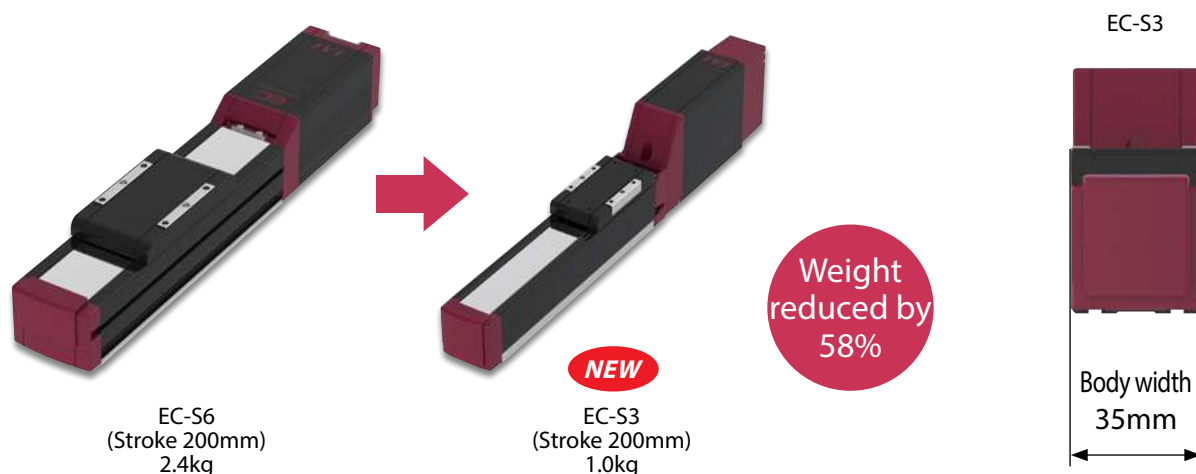

2. Mounting direction of the motor and controller unit is selectable.

The direction of the motor and controller unit can be selected according to the application (See P105).

Retrofit changes of the mounting direction are also possible.

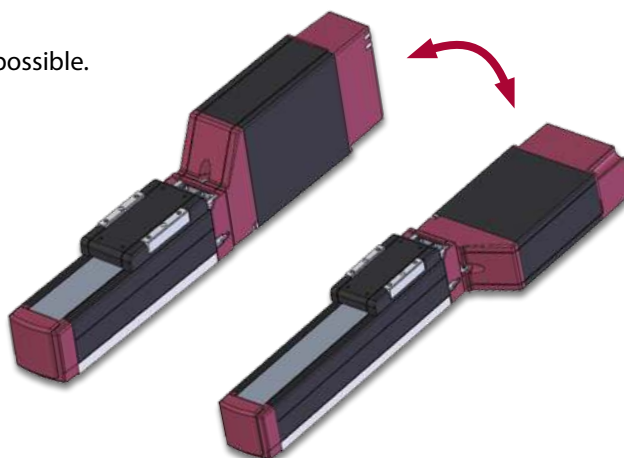

Motor side-mounted type is added as standard!

Motor side-mounted specification




1. The overall length has been shortened.

The overall length has been shortened by up to 133.5mm, allowing a smaller installation space in the longitudinal direction.




2. No extra space for maintenance is necessary.

A maintenance space required for the straight type is no longer necessary, providing wider options for equipment layout within the facility.

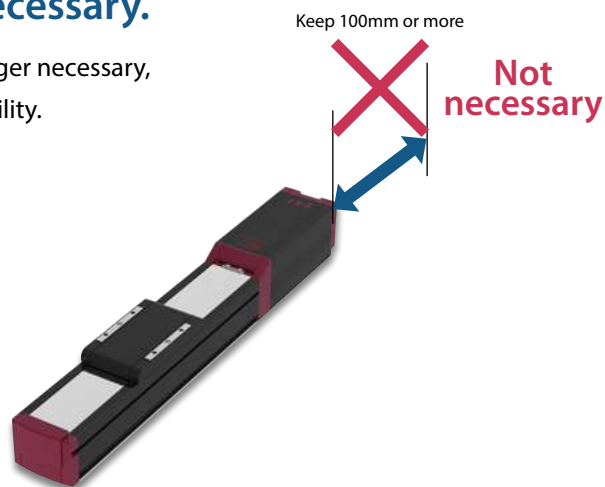

3. Compact combination possible

The shorter overall length results in a shorter overhang length, which allows more compact axes to be used in combined axis systems.

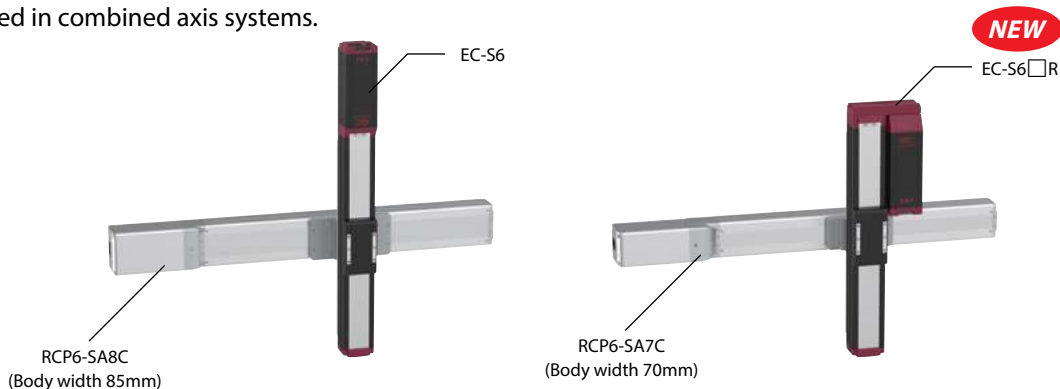

Model Specification Items

ELECYLINDER®

EC - **Type** **Ball screw lead** **Specifications** **Motor mounting Method** - **Stroke** - **Power / I/O cable length** - **Options**

S3	Slider width 35mm
S4	Slider width 44mm
S6	Slider 63mm width
S7	Slider 73mm width (75mm for high rigidity type)
R6	Rod 63mm width
R7	Rod 73mm width
RR3	Radial Cylinder width 35mm
RR4	Radial Cylinder width 44mm
RR6	Radial cylinder 63mm width
RR7	Radial cylinder 73mm width (High rigid type is 75mm)
RP4	Rod type side-mounted motor specification 34mm width
GS4	Rod type side-mounted motor specification 55mm width (with single guide)
GD4	Rod type side-mounted motor specification 76mm width (with double guide)
TC4	Mini table type (table part) 31mm width
TW4	Mini table type (table part) 73mm width

0	0m
?	?
10	10m

Cable length
0: Power I/O connector supplied
1 to 10: Power I/O cable supplied

30	30mm
?	?
800	800mm

Left blank	Slider type, rod type, radial cylinder type, mini table type
AH	High rigidity slider type High rigidity radial cylinder type
W	Waterproof specification

Blank	Motor in-line specification
R	Side-mounted motor specification

Left blank	Incremental encoder specification, NPN specification, no option
ACS	Actuator pigtail cable length: 5m
B	Brake
FFA	Tip adapter (flange)
FL	Flange (front)
FT	Foot bracket (bolting from top)
GT2	GS4 guide right mount / TC4 table right mount
GT3	GS4 guide bottom mount / TC4 table bottom mount
GT4	GS4 guide left mount / TC4 table left mount
ML	Side-mounted motor to the left
MR	Side-mounted motor to the right
MOB	Motor mounting direction change (bottom)
MOL	Motor mounting direction change (left)
MOR	Motor mounting direction change (right)
MOT	Motor mounting direction change (top)
NFA	Tip adapter (internal thread)
NJ	Knuckle joint
NJPB	Knuckle joint + oscillation receiving bracket
NM	Non-motor end specification
PN	PNP specification
QR	Clevis bracket
QRPB	Clevis bracket + oscillation receiving bracket
TMD2	Split motor and controller power supply specification
WA	Battery-less Absolute Encoder specification
WL	Wireless communication specification
WL2	Wireless axis-operation specifications











<S3/RR3>	<S4/RR4>	<S6/R6/RR6>	<S7/R7/RR7>	<RP4/GS4/GD4/TC4/TW4>
L Lead 2mm	L Lead 2.5mm	L Lead 3mm	L Lead 4mm	L Lead 2mm
M Lead 4mm	M Lead 5mm	M Lead 6mm	M Lead 8mm	M Lead 4mm
H Lead 6mm	H Lead 10mm	H Lead 12mm	H Lead 16mm	H Lead 6mm
	S Lead 16mm	S Lead 20mm	S Lead 24mm	

* The range of selectable options varies according to the actuator type.
For details, please refer to the pages showing each type.

Product List

Slider Type









* Speed limitation applies to push motion. See the manual or contact IAI.

Spec	Type	External view	Body width (mm)	Lead (mm)	Positioning repeatability (mm)	Stroke (mm)	Max. speed (mm/s)	Max. push force (N)*	Max. payload (kg)	
									Horizontal	Vertical
Coupled Motor	S3		 35mm	6	±0.05	50 to 300 (per 50st)	420	45	3.5	1.5
				4			280	68	6	2.5
				2			140	136	9	3.5
	S4		 44mm	16	±0.05	50 to 300 (per 50st)	800	41	7	1.5
				10			700	66	12	2.5
				5			350	132	15	5
				2.5			175 <150>	263	18	6.5
	S6		 63mm	20	±0.05	50 to 400 (per 50st)	800	67	15	1
				12			700	112	26	2.5
				6			450	224	32	6
				3			225	449	40	12.5
	S7		 73mm	24	±0.05	50 to 500 (per 50st)	860	139	37	3
				16			700	209	46	8
				8			420	418	51	16
				4			210 <175>	836	51	19
Motor side-mounted specification	S6□R		 63mm	20	±0.05	50 to 400 (per 50st)	800	67	15	1
				12			700	112	26	2.5
				6			450 <400>	224	32	6
				3			225	449	40	12.5
	S7□R		 73mm	24	±0.05	50 to 500 (per 50st)	860	139	37	3
				16			700	209	46	8
				8			420 <350>	418	51	16
				4			190 <175>	836	51	19

Figures in < > represent vertical operations.

High Rigidity Slider Type











* Speed limitation applies to push motion. See the manual or contact IAI.

Spec	Type	External view	Body width (mm)	Lead (mm)	Positioning repeatability (mm)	Stroke (mm)	Max. speed (mm/s)	Max. push force (N)*	Max. payload (kg)	
									Horizontal	Vertical
Coupled Motor	S6□AH		 63mm	20	±0.05	50 to 800 (per 50st)	1440 <1280>	67	15	1
				12			900	112	26	2.5
				6			450	224	32	6
				3			225	449	40	16
	S7□AH		 75mm	24	±0.05	50 to 800 (per 50st)	1230	139	37	3
				16			980 <840>	209	46	8
				8			420	418	51	16
				4			210 <175>	836	51	25
Motor side-mounted specification	S6□AHR		 63mm	20	±0.05	50 to 800 (per 50st)	1120	67	15	1
				12			900 <800>	112	26	2.5
				6			450 <400>	224	32	6
				3			225	449	40	16
	S7□AHR		 75mm	24	±0.05	50 to 800 (per 50st)	1080 <860>	139	37	3
				16			840 <700>	209	46	8
				8			420 <350>	418	51	16
				4			190 <175>	836	51	25

Product List

Mini Rod Type / Rod Type

* Speed limitation applies to push motion. See the manual or contact IAI.

Spec	Type	External view	Body width (mm)	Lead (mm)	Positioning repeatability (mm)	Stroke (mm)	Max. speed (mm/s)	Max. push force (N)*	Max. payload (kg)	
									Horizontal	Vertical
Motor side-mounted specification	RP4			6	±0.05	30, 50	300	30	2.5	1
				4			200	45	4	1.5
				2			100	90	8	2.5
	GS4			6	±0.05	30, 50	300	30	2.5	1
				4			200	45	4	1.5
				2			100	90	8	2.5
	GD4			6	±0.05	30, 50	300	30	2.5	1
				4			200	45	4	1.5
				2			100	90	8	2.5
Coupled Motor	R6			20	±0.05	50 to 300 (per 50st)	800	67	6	1.5
				12			700	112	25	4
				6			450	224	40	10
				3			225	449	60	12.5
	R7			24	±0.05	50 to 300 (per 50st)	860 (640)	182	20	3
				16			700 (560)	273	50	8
				8			350	547	60	18
				4			175	1094	80	19

Figures in < > represent vertical operations.

Radial Cylinder








* Speed limitation applies to push motion. See the manual or contact IAI.

Spec	Type	External view	Body width (mm)	Lead (mm)	Positioning repeatability (mm)	Stroke (mm)	Max. speed (mm/s)	Max. push force (N)*	Max. payload (kg)	
									Horizontal	Vertical
Coupled Motor	RR3			6	±0.05	50 to 300 (per 50st)	420	45	9	1.5
				4			280	68	14	2.5
				2			140	136	18	3.5
	RR4			16	±0.05	50 to 300 (per 50st)	800	41	7	1.5
				10			700	66	16	2.5
				5			350	132	25	5
				2.5			175 <150>	263	35	6.5
	RR6			20	±0.05	65 to 315 (per 50st)	800	67	6	1.5
				12			700	112	25	4
				6			450	224	40	10
				3			225	449	60	12.5
	RR7			24	±0.05	65 to 315 (per 50st)	860 <640>	182	20	3
				16			700 <560>	273	50	8
				8			350	547	60	18
				4			175	1094	80	19
Motor side-mounted specification	RR6□R			20	±0.05	65 to 315 (per 50st)	800	67	6	1.5
				12			700	112	25	4
				6			450	224	40	10
				3			225	449	60	12.5
	RR7□R			24	±0.05	65 to 315 (per 50st)	860 <640>	182	20	3
				16			700 <560>	273	50	8
				8			320 <280>	547	60	18
				4			160 <140>	1094	80	19

Figures in < > represent vertical operations.

High Rigidity Radial Cylinder





* Speed limitation applies to push motion. See the manual or contact IAI.

Spec	Type	External view	Body width (mm)	Lead (mm)	Positioning repeatability (mm)	Stroke (mm)	Max. speed (mm/s)	Max. push force (N)*	Max. payload (kg)	
									Horizontal	Vertical
Coupled motor	RR6□AH			20	±0.05	50 to 400 (per 50st)	800	67	6	1.5
				12			700	112	25	4
				6			450	224	40	10
				3			225	449	60	20
	RR7□AH			24	±0.05	50 to 500 (per 50st)	860 <640>	182	20	3
				16			700 <560>	273	50	8
				8			350	547	60	18
				4			175	1094	80	28
Motor side-mounted specification	RR6□AHR			20	±0.05	50 to 400 (per 50st)	800	67	6	1.5
				12			700	112	25	4
				6			450	224	40	10
				3			225	449	60	20
	RR7□AHR			24	±0.05	50 to 500 (per 50st)	860 <640>	182	20	3
				16			640 <560>	273	50	8
				8			320 <280>	547	60	18
				4			150 <140>	1094	80	28

Figures in < > represent vertical operations

Mini Table type









* Speed limitation applies to push motion. See the manual or contact IAI.

Spec	Type	External view	Body width (mm)	Lead (mm)	Positioning repeatability (mm)	Stroke (mm)	Max. speed (mm/s)	Max. push force (N)*	Max. payload (kg)	
									Horizontal	Vertical
Motor side-mounted specification	TC4			6	±0.05	30, 50	300	30	2.5	1
				4			200	45	4	1.5
				2			100	90	8	2.5
	TW4			6	±0.05	30, 50	300	30	2.5	1
				4			200	45	4	1.5
				2			100	90	8	2.5

Figures in < > represent vertical operations

Splash-proof type

* Speed limitation applies to push motion. See the manual or contact IAI.

Spec	Type	External view	Body width (mm)	Lead (mm)	Positioning repeatability (mm)	Stroke (mm)	Max. speed (mm/s)	Max. push force (N)*	Max. payload (kg)	
									Horizontal	Vertical
Coupled motor	R6□W			20	±0.05	50 to 300 (per 50st)	800	67	6	1.5
				12			700	112	25	4
				6			450	224	40	10
				3			225	449	60	12.5
	R7□W			24	±0.05	50 to 300 (per 50st)	860 <640>	182	20	3
				16			700 <560>	273	50	8
				8			350	547	60	18
				4			175	1094	80	19
Coupled motor	RR6□W			20	±0.05	65 to 315 (per 50st)	800	67	6	1.5
				12			700	112	25	4
				6			450	224	40	10
				3			225	449	60	12.5
	RR7□W			24	±0.05	65 to 315 (per 50st)	860 <640>	182	20	3
				16			700 <560>	273	50	8
				8			350	547	60	18
				4			175	1094	80	19

Figures in < > represent vertical operations

IAI America, Inc.

US Headquarters: 2690 W. 237th Street, Torrance, CA 90505 (800) 736-1712

Chicago Office: 110 E. State Pkwy, Schaumburg, IL 60173 (800) 944-0333

Atlanta Office: 1220 Kennestone Circle, Suite 108, Marietta, GA 30066 (888) 354-9470

The information contained in this product brochure may change without prior notice due to product improvements.

IAI Industrieroboter GmbH

Ober der Röth 4, D-65824 Schwalbach am Taunus, Germany

IAI (Shanghai) Co., Ltd.

Shanghai Jiahua Business Center A8-303, 808, Hongqiao Rd., Shanghai 200030, China

IAI Robot (Thailand) Co., Ltd.

825 Phairojkiya Tower 7th Floor, Bangna-Trad RD., Bangna, Bangna, Bangkok 10260, Thailand